

## Product Card

1-gang 2-way switch insert, 16AX/250V, 2 X-terminals, lamp possibility



# Switch insert



1-gang 2-way switch insert, 16AX/250V, 2 X-terminals, lamp possibility

**Type:** 1066.21

**GTIN:** 6418677328626



6-switch insert without rocker. All 1-gang rockers are suitable for the insert except 1788-xx. The switch has 1 change-over contact and 2 X-terminals. The X-terminals can be used for extending other wires or connecting the signal light. The signal light can only be set as a search- or signal light.

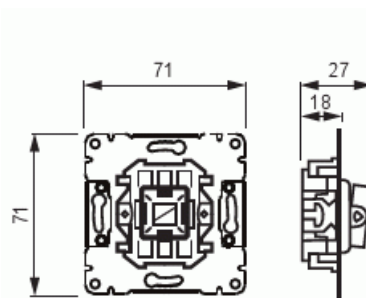

## Technical specification

### General Information

Product ID: 2TKA000175G1

### Electrical quantities

Rated current: 16 AX

Rated voltage: 250 V

### Classification

Enclosure class: IP20

# Product Card

1-gang 2-way switch insert, 16AX/250V, 2 X-terminals, lamp possibility



## Packing

Package:	10/100
Unit:	PCS

## ETIM Data

Wiring system:	Two-way switch
Method of operation:	Rocker/button
Assembly arrangement:	Basic element
Push button switch:	No
Number of rockers:	1
Mounting method:	Flush mounted (plaster)
Type of fastening:	Screw mounting
With mounting plate:	No
Material:	Plastic
Material quality:	Thermoplastic
Halogen free:	Yes
Anti-bacterial treatment:	No
Surface protection:	Galvanized
Colour:	Stainless steel
RAL-number (similar):	9010
Label space/information surface:	No
Illumination:	No
Suitable for degree of protection (IP):	IP21
Nominal voltage:	250 V
Rated current:	16 A
Switching current for fluorescent lamps:	16 AX
Feedback-signal contact:	No
Connection type:	Other
Washing machine switch:	No
Device width:	70 mm
Device height:	35 mm
Device depth:	70 mm
Built-in depth:	18 mm

## Product Card

1-gang 2-way switch insert, 16AX/250V, 2 X-terminals, lamp possibility



Min. depth of built-in installation box:

18 mm