


# Earthing strap

Type: PP36  
GTIN: 6410050260974  




The earthing conductors, max. 35 mm<sup>2</sup> Cu, are connected to the various pipework using an earthing strap PP36 with a strap clamp AM2 and terminal AM3. In case a 50 mm<sup>2</sup> or 70 mm<sup>2</sup> Cu-conductor is connected to the earthing block, both ends of the earthing strap must be pressed together with the terminal to get sufficient conductivity. The terminal and the strap clamp are made of zinc-plated and yellow passivated steel. The 6 mm screws are tightened with a 10 mm wrench. The earthing strap is made of tinned annealed copper 1,5 mm thick.

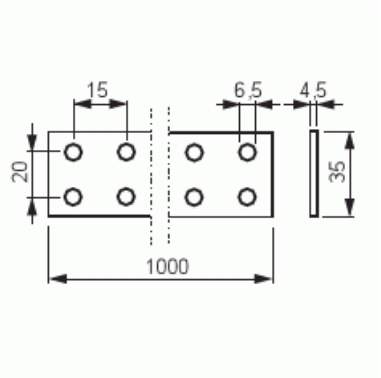

## Technical specification

### General Information

|             |              |
|-------------|--------------|
| Product ID: | 2TKA110011G1 |
|-------------|--------------|

### Packing

|          |     |
|----------|-----|
| Package: | 20  |
| Unit:    | PCS |

### ETIM Data

|                          |             |
|--------------------------|-------------|
| Clamping/chucking range: | 13...164 mm |
|--------------------------|-------------|